COURIER «CARAVELLE» II «CONQUEROS» II CON OROLOGIO DIGITALE

SCHEMATIC DIAGRAM

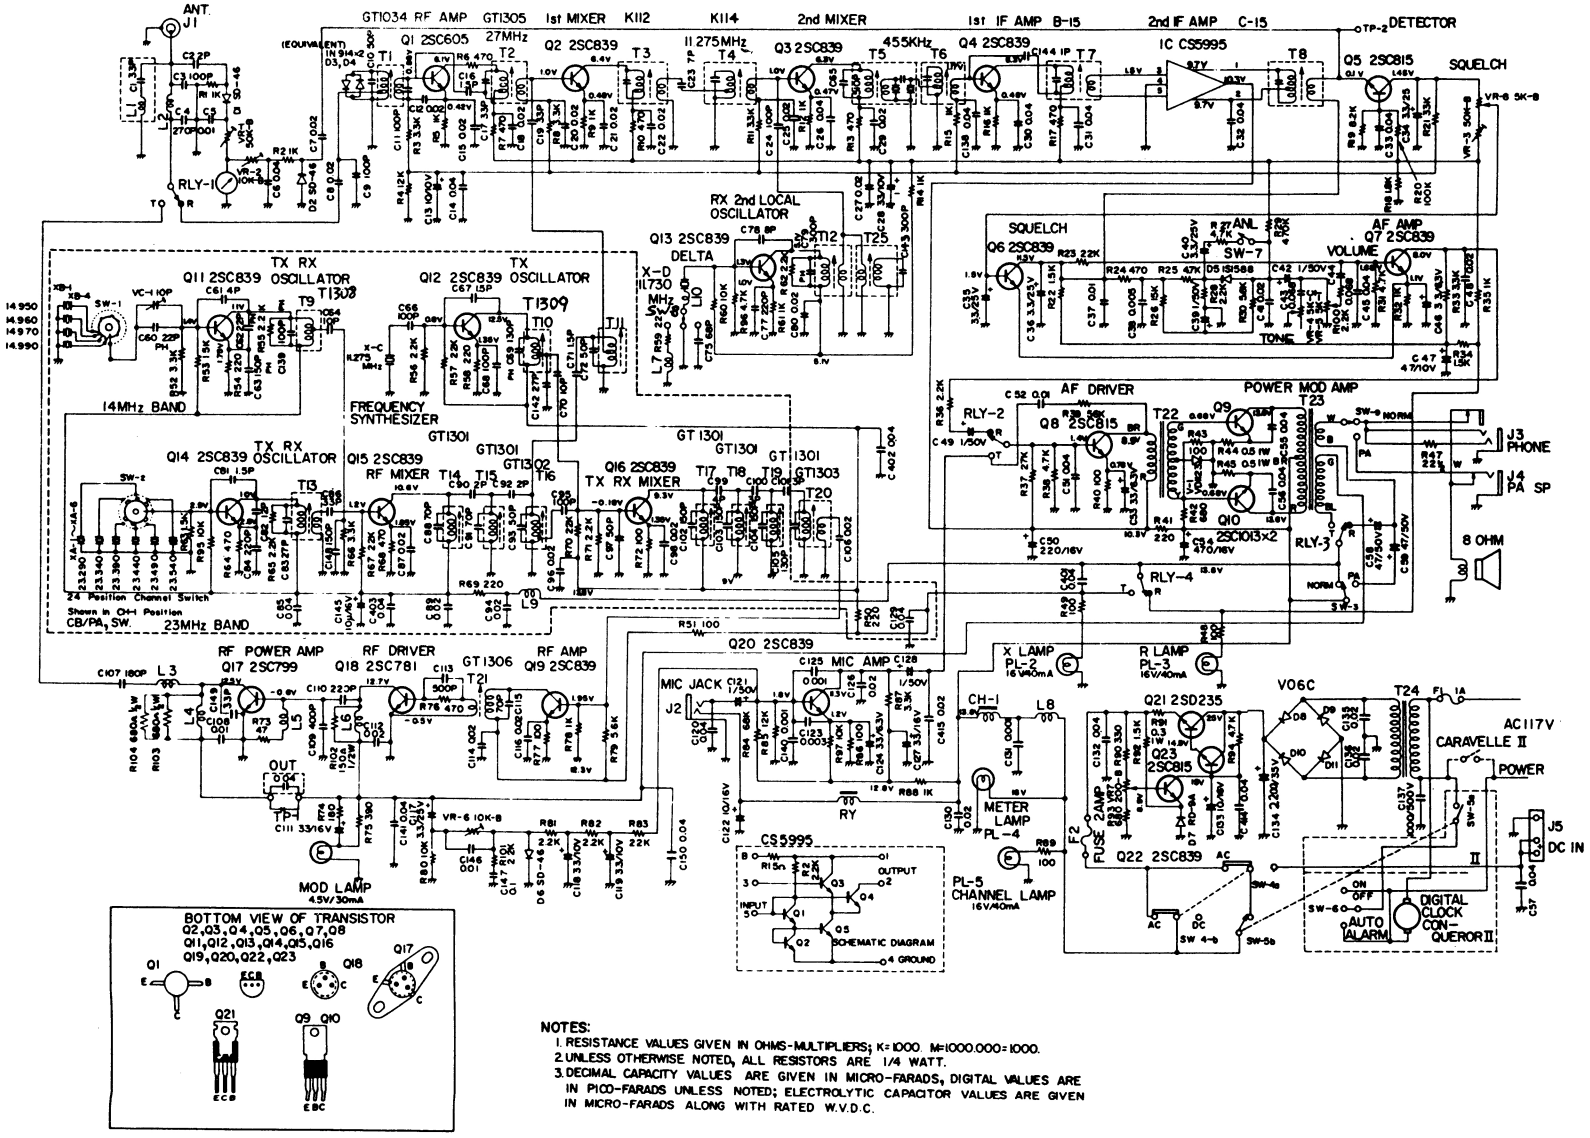

NOTES:

1. RESISTANCE VALUES GIVEN IN OHMS-MULTIPLIERS; K=1000 M=1000.000=1000.
2. UNLESS OTHERWISE NOTED, ALL RESISTORS ARE 1/4 WATT.
3. DECIMAL CAPACITY VALUES ARE GIVEN IN MICRO-FARADS, DIGITAL VALUES ARE IN PICO-FARADS UNLESS NOTED; ELECTROLYTIC CAPACITOR VALUES ARE GIVEN IN MICRO-FARADS ALONG WITH RATED W.V.D.C.